

Liberty Platinum Sound System


Portable Sound System



SIX YEAR WARRANTY

The Liberty Platinum is the fourth generation in the twenty year history of the Liberty. It just keeps getting better with advances in audio technology, music players, LED development and speaker performance.

The Liberty Platinum maintains the integrity of the very first Anchor product - Intelligible Sound, Reliable Performance and Simplicity of Use.

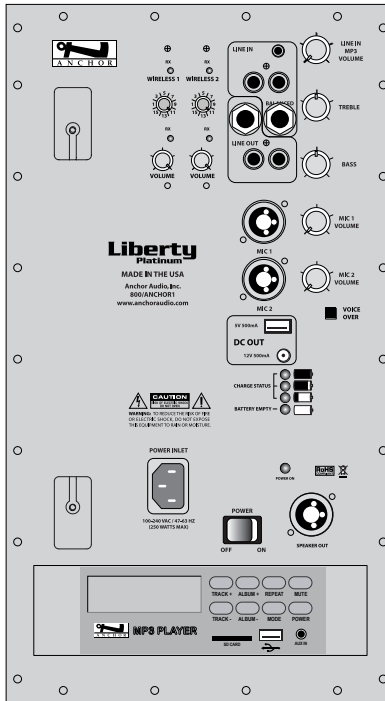

Features

- Reach Crowds of 2,000+
- AC Mode = 125W / DC Mode = 100W
- Single or Dual Built-in UHF Wireless w/ 16 User Selectable Channels
- Built-In MP3 Player Accepts SD Card, USB Flash Drive or 3.5mm input for iPod
- USB Port for Charging MP3/iPod®
- “Voice Over” Music Ducking Feature
- Two Universal Mic Input Jacks
- Recessed Back Panel Protects Knobs and Ports
- True AC/DC - 110/220V Power Supply
- Ceramic Compression Driver
- 10” Neodymium Woofer
- Proprietary Class D Amplifier
- User Replaceable Batteries
- Charging LED Bar Indicator
- Operates 6-8 hrs on a Single Charge
- Speaker Out to Power Companion Speaker

LIBERTY ACCESSORIES

- MIC-90 Professional dynamic, cardioid pattern handheld microphone
- NL-7500 Nylon Slip Cover
- HC-1640 Pelican hard case
- MP3-TOTE Holds MP3 Player & Mic

LIBERTY MODELS

- LIB-7500 AC/DC powered sound system
- LIB-7500M Built-in MP3 player
- LIB-7500U1 1 built-in wireless receiver
- LIB-7500U2 2 built-in wireless receivers
- LIB-7500MU1 Built-in MP3 player & 1 built-in wireless receiver
- LIB-7500MU2 Built-in MP3 player & 2 built-in wireless receivers
- LIB-7501 Unpowered speaker

UHF WIRELESS

- WH-6000 Wireless Handheld mic/transmitter
- WB-6000 Wireless body-pack transmitter w/ handsfree microphone.
- Mic options include:
Over-the-Ear/EM-60T, Lapel/LM-60, Collar/
CM-60, Headband/HBMTA4F

TECHNICAL SPECIFICATIONS

Rated Power Output 125 watts AC / 100 watts DC
 Max SPL @ Rated Power 110 dB
 Battery Two 12 Volt rechargeable, 9.0 AH
 Full recharge: approx 7 hrs.
 Frequency Response 60 Hz – 15 kHz ± 3dB
 Line Output (post fader) isolated, 600 ohm, 1/4" phone
 AC Power Reqs. 100 – 240 VAC, 50/60 Hz, 300W max
 DC Out 12V 500mA
 USB 5V 500mA
 Dimensions (HWD) 22" x 14" x 11.5" (56 x 35.6 x 29.2 cm)
 Weight 38 pounds / 17 Kg

Mic Inputs: Lo-Z (1 K Ω), balanced, XLR
 12 VDC condenser mic (phantom) power
 Hi-Z (10 K Ω), unbalanced, 1/4" phone
 Hi-Z (10 K Ω), unbalanced, 1/8" stereo,
 1/4" phone unbalanced, stereo RCA
 Line In/Out
 Sensitivity For Rated Output
 Lo-Z Microphone -52 dBV (2.5 mVrms)
 Hi-Z Microphone -43 dBV (7.5 mVrms)
 Auxiliary (line) -14 dBV (200 mVrms)
 Phantom Power 36V
 Speaker Out 8 ohm Speakon

(Features & Specifications Subject to Change Without Notice)



Anchor Audio, Inc.

Portable Sound Systems • Torrance, California

888/444-6077

www.anchoraudio.com

S-L/0509