



# BEACON 2

Portable Sound System



## Perfect for...

- Indoor & Outdoor Events
- Schools & Universities
- Sporting Events
- Graduations
- Auditoriums
- Assemblies
- House of Worship
- Parks & Recreation
- Auctions
- Military Training & Ceremonies
- Fitness Centers
- Parades & Community Celebrations
- Ceremonies
- Rental
- Public Gatherings
- Weddings
- and more!




## TECH SPECS

- 120 dB of clear sound
- 150W AC mode / 125W DC mode
- 1.9 GHz wireless frequency
- Two universal microphone input jacks
- 1/4" & 3.5 mm AUX line input
- 1/4" line output
- Built-in rechargeable Lithium Ion batteries
- Lightweight array tower has eight 4" neodymium speakers
- Base has three 8" neodymium subwoofers

## FEATURES

- Reaches crowds of 2,500+
- Connect up to four wireless mics
- Anchor AIR compatible
- Built-in Class 1 Bluetooth
- Nylon mic storage bag
- Durable wheels for easy transport
- Built-in rechargeable batteries operate 6 - 8 hours on a single charge

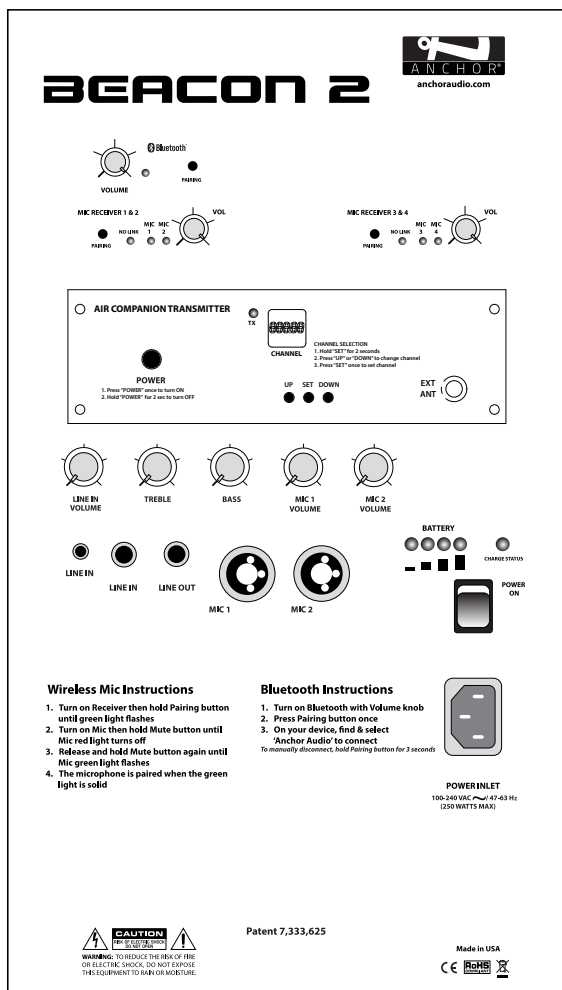

(BEA2-XU4 Back Panel)

## Beacon 2 Models

BEA2	Beacon with built-in Bluetooth
BEA2-U2	Beacon with built-in Bluetooth & dual wireless mic receiver
BEA2-U4	Beacon with built-in Bluetooth & two dual wireless mic receivers
BEA2-X	Beacon with built-in Bluetooth & AIR wireless transmitter
BEA2-XU2	Beacon with built-in Bluetooth, AIR wireless transmitter & dual wireless mic receiver
BEA2-XU4	Beacon with built-in Bluetooth, AIR wireless transmitter & two dual wireless mic receivers
BEA2-R	Beacon with built-in Bluetooth & AIR wireless receiver
BEA2-RU2	Beacon with built-in Bluetooth, AIR wireless receiver & dual wireless mic receiver
BEA2-RU4	Beacon with built-in Bluetooth, AIR wireless receiver & two dual wireless mic receivers

## Microphones

WH-LINK	Wireless handheld mic (1.9 GHz)
WB-LINK	Wireless belt pack transmitter (1.9 GHz)
HBM-LINK	Headband mic (3.5 mm plug)
CM-LINK	Collar mic (3.5 mm plug)
EM-LINK	UltraLite mic (3.5 mm plug)
LM-LINK	Lapel mic (3.5 mm plug)
MIC-90	Wired handheld mic with 20 ft. cable (XLR plug)

## Technical Specifications

Rated Power Output	150 watts AC / 125 watts DC
Max SPL @ Rated Power	120 dB @ 1 meter
Frequency Response	60 Hz - 15 kHz ± 3 dB
Microphone Wireless Frequency	1.9 GHz DECT
Microphone Wireless Range	300'+ line of sight
Mic Inputs	Lo-Z (1 KW), balanced, XLR 12 VDC condenser mic (phantom) power Hi-Z (10 KW), unbalanced, 1/4" phone
Line Inputs	Stereo 3.5 mm, 1/4" balanced
Line Output (post fader)	Isolated, 600 W, 1/4" phone
AC Power Reqs.	100 - 240 VAC, 50/60 Hz, 250W max
Battery	Two 12V LFP rechargeable batteries, 7.0 AH
Dimensions Closed (HWD)	28" x 11" x 18.5" (71.1 x 28 x 47 cm)
Dimensions Opened (HWD)	71.5" x 11" x 18.5" (181.6 x 28 x 47 cm)
Weight	43 lbs / 19.5 Kg
Warranty	6 years

## Sensitivity For Rated Output

Lo-Z Microphone	-52 dBV (2.5 mVrms)
Hi-Z Microphone	-43 dBV (7.5 mVrms)
Auxiliary (line)	-14 dBV (200 mVrms)
Phantom Power	36V

## Anchor AIR Technical Specifications

AIR Frequency Range	902 - 928 MHz
AIR Wireless Range	300'+ line of sight



(Features & Specifications Subject to Change Without Notice)