

# ClassACT Speaker Monitor

## Technical Specifications



The ClassACT (CA-130U1) is a light-weight, easy to use sound system that fills the classroom with your voice using a wireless microphone. With a hands free microphone you can make a presentation, write on a whiteboard or operate your projector without interrupting your presentation. Teachers, corporate presenters and training instructors can all use a ClassACT.



### CLASSACT MODELS

CA-130U1	One built-in wireless receiver
CA-130U1RC	One built-in wireless receiver/Remote control
CA-130U1RCBK	One built-in wireless receiver/Remote control/black
CA-130U1TBK	One built-in wireless receiver/black
CLASSACT	CA-130U1, wireless remote control & one handheld or handsfree wireless microphone


### Features

- Reach Crowds of 100+
- 101 dB of Clear Sound from 30 Watt Amplifier
- Anchor Wireless Receiver & Microphone with 16 User-selectable Channels
- Even Sound Distribution Insures Everyone in Attendance Can Hear You
- Magnetically Shielded Speaker for AV Use
- "Daisy-Chain" Second Speaker for Larger Rooms
- Remote Control for Volume & Mute
- Controlled Wireless Antenna Range Keeps the Audio in the Room
- Unit can be Mounted on a Wall, Ceiling or Speaker Stand
- Durable Injection-Molded Polypropylene Case
- Lightweight Weighs Just 8.5 Pounds

Save Your Voice • Quit Yelling  
Everyone Hears You with a ClassAct Sound System • Fill Any 30' X 30' Room with Sound!

### ACCESSORIES

REMOTE-130	Infrared remote control
MIC-90P	Professional dynamic, cardioid pattern handheld microphone
CC-100	Speaker/accessory bag
CC-100XL	Speaker/accessory bag - large
HC-ARMOR24-AN	Anchor Armor hard case - Two AN series speaker monitors
SS-250	Speaker stand
MSB-201	Microphone stand with boom
SB-1	Stand mount
SB-3	Ceiling mount bracket
SB-360	360° swivel wall bracket

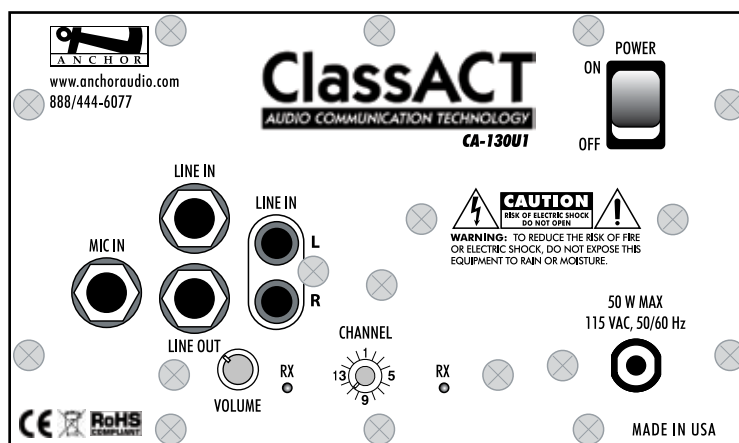

(CA-130U1 Control Panel Shown)

### UHF WIRELESS

WH-6000	Wireless handheld microphone/transmitter
WB-6000	Wireless body-pack transmitter with handsfree microphone. Microphone options include: Over-the-Ear/EM-60T, Lapel/LM-60, Collar/CM-60, Headband/HBM-TA4F

### Technical Specifications

Rated Power Output	30 watts	Inputs	
Max SPL @ Rated Power	101 dB @ 1 meter	Line (2)	Hi-Z, unbalanced, RCA (summing L+R)
Wireless Antenna Range	30 feet / 9.14 meter	Microphone	Lo-Z, unbalanced, 1/4" phone
Frequency Response	65 Hz - 18 kHz $\pm$ 3 dB	Output	
Speaker Type	4.5" woofer, 10 mm dome tweeter	Line	Lo-Z, buffered, 1/4" phone
AC Power Reqs.	110 - 125 VAC, 50/60 Hz	Sensitivity For Rated Output	
Export Model	208 - 240 VAC, 50/60 Hz (50W max)	Line	-20 dBV (100 mVrms)
Fuse Rating	T 1.0A / 250V	Microphone	-43 dBV (7.5 mVrms)
Export Model	T 0.5A / 250V (internally mounted)		
Dimensions (HWD)	5.25" x 8.4" x 9" (13 x 21 x 23 cm)		
Weight	8.5 lbs / 3.8 Kg		

(Features & Specifications Subject To Change Without Notice)



**Anchor Audio, Inc.**  
Portable Sound Systems • Carlsbad, California

**800.262.4671**

[www.anchoraudio.com](http://www.anchoraudio.com)

S-CA/0810